



2 LIGHT SLIDER

Platinum Pro220

THE ENERGY KING
Windows & Doors



Features

- **DOUBLE STRENGTH** insulated **LOW-E** with **ARGON GAS** glass sealed including **SUPER SPACER®** technology
- **SILL EXTENSION** with dual durometer for ease of installation
- **EXTRUDED** ½ screen with **BETTER VUE®** screening provides improved visibility, enhanced insect performance, air flow and light transmission
- **LIFT OUT SASH** for easy cleaning from the inside
- **INTERNAL ALUMINUM REINFORCEMENT**
- **FULLY WELDED FRAME & SASH**
- **BOTH SASHES SLIDE**
- **FULL INTERLOCK AT THE MEETING RAIL**
- Energy Efficient **FOAMED PROFILES**
- **DOUBLE LOCKS** included on heights of 27½" and over
- **3¼" FULLY WELDED FRAME**
- **UPGRADE to ENERGY STAR V7 with TRIPLE GLAZING**

Think about this:

The spacer system you choose is just as important as the window!
That's why we use:

Super Spacer®
SEALED



inside view

MANUFACTURING LIMITS	
MANUFACTURING INCREMENTS - WIDTH AND HEIGHT EVERY ¼" INCH	
MINIMUM WIDTH 24½"	MINIMUM HEIGHT 14"
MAXIMUM WIDTH 76"	MAXIMUM HEIGHT 64"
MAXIMUM WIDTH + HEIGHT = 128" UI	

LIFETIME
RESIDENTIAL
WARRANTY
GLASS BREAKAGE

Window Options

EXTERIOR PAINTED COLORS

(interior color is white or wood grain)




INTERIOR WOOD GRAIN COLORS

(wood grain color choices - natural oak or cherry)



STANDARD STRENGTH TRIPLE PANE OR DOUBLE STRENGTH TRIPLE PANE

Two panes (standard strength or double strength) of Low-E glass and one pane of clear glass with argon gas in both chambers



Privacy Plus Performance OBSCURED GLASS



TEMPERED GLASS



Grids are installed between the glass panes during manufacturing for easy cleaning

GRIDS PATTERNS AVAILABLE



CONTOUR GRIDS




FLAT GRIDS



FINGER JOINT PRIMED EXTENSION JAMBS



NAILING FIN

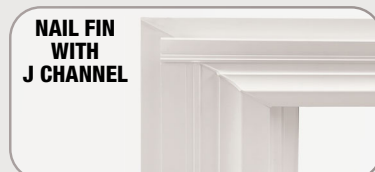

NAIL FIN WITH J CHANNEL