



DOUBLE HUNG

Pro150



STRUCTURAL TEST DATA

FOR EGRESS SIZES ON THE FOLLOWING WINDOWS:


- These Sizes Also Meet Minimum 20" Clear Egress Width And 24" Clear Egress Height

| MODEL | SIZE | GLASS TYPE | FORCED ENTRY RESISTANCE | AIR INFILTRATION SCFM/FT | PRODUCT DESIGNATION | DESIGN PRESSURE | MAXIMUM WATER PRESSURE ACHIEVED | MAXIMUM STRUCTURAL PRESSURE ACHIEVED | MANUFACTURED SIZE REQUIRED TO MEET 5.7 SF EGRESS WITH STANDARD HARDWARE |
|---------------|---------|--------------|-------------------------|--------------------------|---------------------|-----------------|---------------------------------|--------------------------------------|-------------------------------------------------------------------------|
| Pro150 | 40 X 63 | 3/4 DUAL SSB | GRADE 10 | 0.14 | R-PG40 | 40.1 PSF | 7.52 PSF | 60.15 PSF | 37 5/8 X 59 1/2 |

THERMAL PROPERTIES

FOR ALL OF THE FOLLOWING WINDOWS:

- Dual Glass consists of one light RLE 70/36 & one light clear
- Triple Glass consists of two lights RLE 70/36 & one light clear
- All air spaces contain Argon Gas

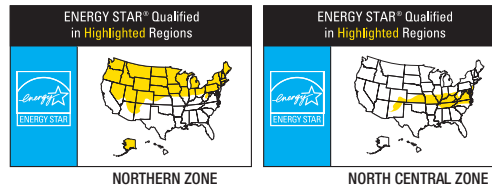

Pro150 DOUBLE HUNG

| DOUBLE HUNG Pro150 | GLAZING OPTION | FOAM FILLED YES / NO | GRIDS YES / NO | U-VALUE | R-VALUE | SOLAR HEAT GAIN COEFFICIENT | CONDENSATION RESISTANCE | VISUAL TRANSMITTANCE | 2017 ENERGY STAR LABEL | |
|--------------------|----------------|----------------------|----------------|---------|---------|-----------------------------|-------------------------|----------------------|------------------------|--------------------|
| | | | | | | | | | NORTHERN ZONE | NORTH CENTRAL ZONE |



MODELS Pro150

| 1 Guardian Climaguard 70/36 Surface 2 | | DUAL GLAZED STANDARD STRENGTH GLASS | | | | | | | √ = Qualified | |
|---------------------------------------|-----|-------------------------------------|------|------|------|----|------|---|---------------|--|
| Low-E ¹ Argon Dual SSB | Yes | No | 0.27 | 3.70 | 0.30 | 60 | 0.55 | √ | √ | |
| Low-E ¹ Argon Dual SSB | Yes | Yes | 0.27 | 3.70 | 0.27 | 60 | 0.49 | √ | √ | |

GLOSSARY OF TERMS

U VALUE – The rate of heat flow through a glazing system: the lower the value, the better the insulating quality.

R VALUE – The resistance to temperature change through a glazing system, the higher the value, the better the insulating quality.

SOLAR HEAT GAIN – The percentage of heat gained from both direct sunlight and absorbed heat. The smaller the number, the greater the ability to reduce solar heat gain.

CONDENSATION RESISTANCE FACTOR – A measure of the effectiveness of window or glazing system to reduce the potential for condensation. The higher the condensation resistance factor, the more efficient the window and glazing system.

VISIBLE TRANSMITTANCE – The percentage of light that is transmitted through glass in the visible light spectrum. The higher the number the higher the percentage of visible light transmitted through the window.



DOUBLE HUNG

Pro150



Product Specifications

Pro-Series Double Hung

Main Frame – Comprised of rigid Polyvinylchloride (PVC) multi-hollow extrusions with all exterior walls specified to 0.062” thickness and interior walls specified to 0.050” thickness. It has been designed as a sloped sill double hung with all corners fusion welded. The window has been designed for both new construction and replacement installations with an extruded integral nail fin added for new construction. The main frame has a jamb depth of 3 1/4”. Accessory grooves are incorporated in the design to allow for interior and exterior trim options.

Sash – Comprised of rigid Polyvinylchloride (PVC) multi-hollow extrusions with all exterior walls specified to 0.062” thickness and interior walls specified to 0.050” thickness. Aluminum reinforcement in the lock rail provides structural assistance and allows for secure lock installation. Weather stripping above and below the interlocking point reduces air infiltration at the meeting rails. A weather strip cover leg creates a smooth finished appearance. An integral low profile handle rail provides less interference for horizontal blind installation.

Glazing – Insulated glass panels are provided in two overall thicknesses. Dual glazed units are 3/4” overall and Triple glazed units are 7/8” overall. All units are assembled with Super Spacer™ warm edge technology to reduce the probability for condensation. Low-E coated glass and argon gas filled air spaces are incorporated to raise energy efficiency. Each glass unit is dual sealed with the Super Spacer™ adhesive and a secondary hot melt butyl seal along the entire perimeter. Insulated glass units are laid in a back bedding of silicone then held in place with snap in glazing strips.

Weather Stripping - All Platinum Pro Products and NYS weatherization models come with Owens Corning Air Sealing Technology. This is a dense wool pile with poly fin center wall that out performs conventional weather stripping.

Hardware – Constant force coil balance systems are utilized to provide long lasting superior performance. Our balance system uses shoes that travel with the sash providing the most ventilation or egress area. Tilt latches and locking pivot bar shoes allow for easy tilt in cleaning of the exterior glass and sash. On windows 27 1/2” and wider two cam locks are included and on windows less than 27 1/2” wide a single cam lock is located in the center of the lock rail. Vent stops are provided in the top sash to prevent the bottom sash from opening more than 4 inches.

Screen – Screens are comprised of extruded rails and come with Better Vue™ fiberglass insect screening to be less noticeable when looking outside.

Installation – Performed by others. Frames must be installed straight, plumb and level following our installation guidelines at the link below.

<http://www.energykingwindows.com/assets/replacement-windows---measuring-guide---installation-instructions.pdf>

<http://www.energykingwindows.com/assets/new-construction-window--installation-instructions.pdf>

THE
ENERGY KING
Windows & Doors